

Specification


1. BLDC Centrifugal fan type: FLH355/120B-2233-3-Y01
2. Motor type: ZWW102C-AC3-Y01
3. Impeller type: φ355/120B
4. Impeller material: sheet aluminium
5. Inlet nozzles: Galvanised sheet steel
6. Duty: continuous
7. Rated Voltage: 230VAC 50/60Hz
8. Rotation: CW (Viewed from rotor)
9. Bearing: ball bearing
10. Dielectric strength: 1500VAC 1min 10mA
11. Operation temperature: -20℃~+40℃
12. Storage temperature: -30℃~+60℃
13. Type of protection: IP20
14. Insulation class: B
15. EMC interference emission: EN61000-6-3
interference immunity: EN61000-6-2
Harmonic: DIN EN61000-3-2/3
16. Totaly Electronic protection: Yes
17. Weight: 5.5Kg
18. Balancing accuracy: G6.3

AC Power Cable (电源线)

NO	AWG	Color (颜色)	Definition (定义)
1	18	Brown (棕)	L
2	18	Blue (蓝)	N
3	18	Yellow/Green (黄/绿)	PE

Control Cable (控制线)

NO	AWG	Color (颜色)	Definition (定义)
1	22	Red (红)	+10V Output (+10V输出)
2	22	Yellow (黄)	Input (输入)
3	22	White (白)	FG (信号)
4	22	Blue (蓝)	GND (地)

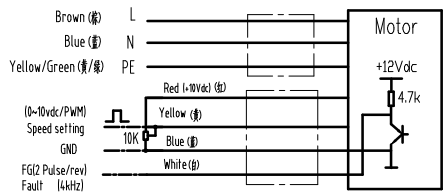

Type (型号)	Voltage range (电压范围) VAC	Rated Voltage (额定电压) VAC	Frequency (频率) Hz	Static Pressure (静压) Pa	Air flow (风量) m ³ /H	Speed (速度) r/min	Power input (输入功率) W	Current (电流) A
FLH355/120B-2233-3-Y01	200~265	230	50/60	100	34.00	1890	498	2.1

						常州祥明电机有限公司			
						FLH355/120B-2233-3-Y01			
设计	处数	分区	更改文件号	签名	年月日	阶段标记		重量	比例
审核						A			1:1
工艺			批准			共张		第张	