
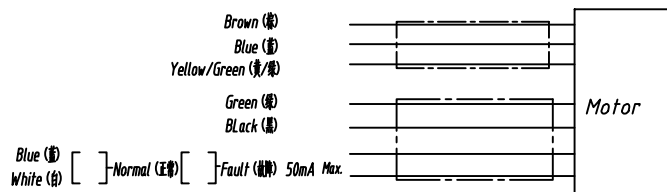


Specification (技术要求)

1. BLDC Centrifugal fan type: FLH310/070B-2233-201-AA01
2. Motor type: ZWW102C-AC201-AA01
3. Impeller type: $\phi 310/070B$
4. Impeller material: sheet aluminium
5. Inlet nozzles: Galvanised sheet steel
6. Duty: continuous
7. Rated Voltage: AC230 50/60Hz
8. Rotation: CW (Viewed from rotor)
9. Bearing: ball bearing
10. Dielectric strength: 1500VAC 1min 10mA
11. Operation temperature: $-20^{\circ}\text{C}\sim+40^{\circ}\text{C}$
12. Storage temperature: $-30^{\circ}\text{C}\sim+70^{\circ}\text{C}$
13. Type of protection: IP44
14. Insulation class: B
15. EMC interference emission: EN61000-6-3
interference immunity: EN61000-6-2
Harmonic: DIN EN61000-3-2/3
16. Totally Electronic protection: Yes
17. Weight: 4.5Kg
18. Balancing accuracy: G2.5

1	Brown (棕)
2	Blue (蓝)
3	Yellow/Green (黄/绿)



Blue (蓝) [] Normal (正常) [] Fault (故障) 50mA Max.
White (白) []

Type (型号)	Voltage range (电压范围) VAC	Rated Voltage (额定电压) VAC	Frequency (频率) Hz	Static Pressure (静压) Pa	Air flow (风量) m³/h	Speed (转速) r/min	Power input (输入功率) W	Current (电流) A
FLH310/070B-2233-201-AA01	200~270	230	50/60	0	2534	2340	217	0.965

							常州祥明电机有限公司	
							FLH310/070B-2233-201-AA01	
							CXM3.197.089WX	