


plug socket YLP-08V+pin SYF-01P 0.5A
+lock piece YLS-04V
7-UL1330 FEP Insulator AWC22#

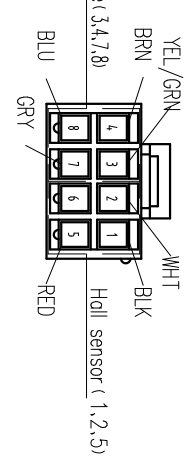

CHANGZHOU XIANGMING INTELLIGENT DRIVE SYSTEM CORPORATION

Changzhou Xiangming Intelligent Drive System Corporation Product Specification

Type: centrifugal fan FLH20/04A-1802D29 (BLXM00033)

Motor Type: Single-phase capacitor running asynchronous motor

No. YMD92/5-2 (1802D29) User

Parameter	Value
Voltage	230V
Frequency	50 Hz
Input	W
Output	W
Current	0.6 A
Air flow	m ³ /h
Press	Pa
Speed	2700 r/min
Start torque	N.m
Rate torque	N.m
Noise	dB(A)
Rated Capacitor	0.6 µF

Resistance (Ω): 592/665

Insulation Class: Class B

Ambient Temperature: 90°C

Overload Protection: 125°C

None plate

230V 50Hz 15W 0.06A 2700r/min 0.6A/F/450V

Dielectric Strength: AC 1500V/mm OR AC 800V/s (5kVA) OK

Length of lead: 200±10mm (See drawing)

Surface Treatment: Anti-rust oil dehydration (SR-60) painted on surface of rotor lamination

Ball Bearing: NMB 608MZZ3035AAA3MT L1551


Rotation: (CW from rotor)

Shaft Position: Random

Shaft Material: 3Cr13

Rubber Damping Washer Material: SILICON RUBBER 50 DEGREE 6JBZ7A-1996

WINDING DIAGRAM

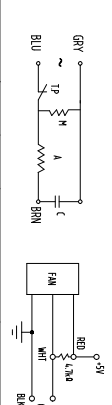

MARK	CODE	NUMBER	NAME	QTY	UNIT	SPEC	NOTE
			CHANGZHOU XIANGMING INTELLIGENT DRIVE SYSTEM CORPORATION				
MARK	REVISE	PARTITION	REVERSION	SIGNATURE	DATE		
DESIGNER			APPROVED				
CHECKED			STAGE MARK	WEIGHT	SCALE		
CRAFET			A		1:1		
STANDARD			TOTAL 1 PAGES		NO. 1 PAGE		BLXM00033